
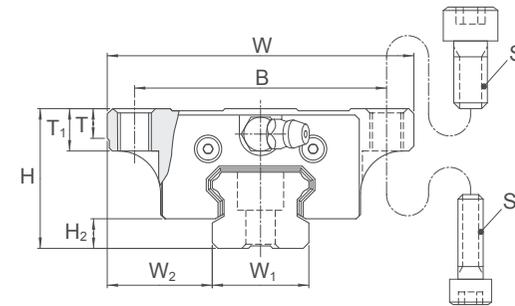
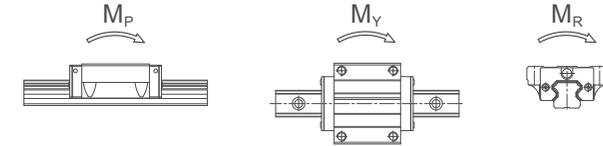


Dimensions of MSB-TE / MSB-E

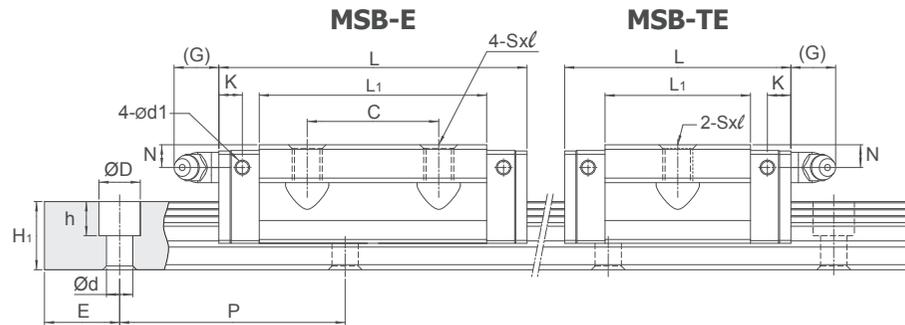

| Model No. | Bolt Size | |
|-----------|----------------|----------------|
| | S ₁ | S ₂ |
| MSB 15 | M5 | M4 |
| MSB 20 | M6 | M5 |
| MSB 25 | M8 | M6 |
| MSB 30 | M10 | M8 |
| MSB 35 | M10 | M8 |

Unit: mm

| Model No. | External dimension | | | | | Carriage dimension | | | | | | | | | | | Grease Nipple |
|------------------------------------|--------------------|---------|--------------------|----------------|----------------|--------------------|---------------|--------|-------------------|---|----------------|-----|-----|-----|----------------|------|---------------|
| | Height H | Width W | Length L | W ₂ | H ₂ | B | C | S × ℓ | L ₁ | T | T ₁ | N | G | K | d ₁ | | |
| MSB 15 TE MSB 15 E | 24 | 52 | 40.2 57.2 | 18.5 | 4.5 | 41 | - 26 | M5×7 | 23.5 40.5 | 5 | 7 | 5.5 | 5.5 | 5.1 | 3.3 | G-M4 | |
| MSB 20 TE MSB 20 E | 28 | 59 | 48 67 | 19.5 | 6 | 49 | - 32 | M6×9 | 29 48 | 5 | 9 | 5.5 | 12 | 5.9 | 3.3 | G-M6 | |
| MSB 25 TE MSB 25 E | 33 | 73 | 60.2 82 | 25 | 7 | 60 | - 35 | M8×10 | 38.7 60.5 | 7 | 10 | 6 | 12 | 6.2 | 3.3 | G-M6 | |
| MSB 30 TE MSB 30 E | 42 | 90 | 68 96.7 | 31 | 9.5 | 72 | - 40 | M10×10 | 43.3 72 | 7 | 10 | 8 | 12 | 6.3 | 3.3 | G-M6 | |
| MSB 35 TE MSB 35 E MSB 35 LE | 48 | 100 | 78 112 137.5 | 33 | 9.5 | 82 | - 50 62 | M10×13 | 46 80 105.5 | 9 | 13 | 8.5 | 12 | 9.8 | 3.3 | G-M6 | |

Note: Rail mounting holes for M3 (6x4.5x3.5) and M4 (7.5x5.3x4.5) are available for MSB15 rail. The codes of rail type are MSB15R for M3 mounting holes, and MSB15U for M4 mounting holes.

Note: The basic dynamic load rating C of ball type is based on the 50 km for nominal life. The conversion between C for 50 km and C₁₀₀ for 100 km is C=1.26 x C₁₀₀.

Note*: Single: Single carriage/ Double: Double carriages closely contacting with each other.

Unit: mm

| Model No. | Rail dimension | | | | | Basic load rating | | Static moment rating | | | | Weight | | |
|------------------------------------|----------------------|-----------------------|---------|--------|----------------------------|----------------------|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-----------|
| | Width W ₁ | Height H ₁ | Pitch P | E std. | D × h × d | Dynamic C kN | Static C ₀ kN | M _p kN-m | | M _y kN-m | | M _r kN-m | Carriage kg | Rail kg/m |
| | | | | | | | | Single* | Double* | Single* | Double* | | | |
| MSB 15 TE MSB 15 E | 15 | 12.5 | 60 | 20 | 6×4.5×3.5 (7.5×5.3×4.5) | 6.7 10.0 | 9.6 16.9 | 0.04 0.10 | 0.26 0.61 | 0.04 0.10 | 0.26 0.61 | 0.07 0.13 | 0.12 0.21 | 1.2 |
| MSB 20 TE MSB 20 E | 20 | 15 | 60 | 20 | 9.5×8.5×6 | 9.7 13.9 | 14.2 23.6 | 0.07 0.18 | 0.44 0.97 | 0.07 0.18 | 0.44 0.97 | 0.14 0.24 | 0.20 0.34 | 2 |
| MSB 25 TE MSB 25 E | 23 | 18 | 60 | 20 | 11×9×7 | 15.6 22.3 | 22.1 36.9 | 0.13 0.35 | 0.91 1.87 | 0.13 0.35 | 0.91 1.87 | 0.26 0.43 | 0.39 0.60 | 3 |
| MSB 30 TE MSB 30 E | 28 | 23 | 80 | 20 | 11×9×7 | 23.1 32.9 | 31.8 53.1 | 0.23 0.60 | 1.39 3.15 | 0.23 0.60 | 1.39 3.15 | 0.45 0.74 | 0.65 1.08 | 4.4 |
| MSB 35 TE MSB 35 E MSB 35 LE | 34 | 27.5 | 80 | 20 | 14×12×9 | 35.7 52.0 63.6 | 44.0 75.5 100.6 | 0.34 0.93 1.60 | 2.81 5.47 8.67 | 0.34 0.93 1.60 | 2.81 5.47 8.67 | 0.75 1.28 1.67 | 0.91 1.61 1.80 | 6.2 |