


Technisches Datenblatt – RA EM/GM

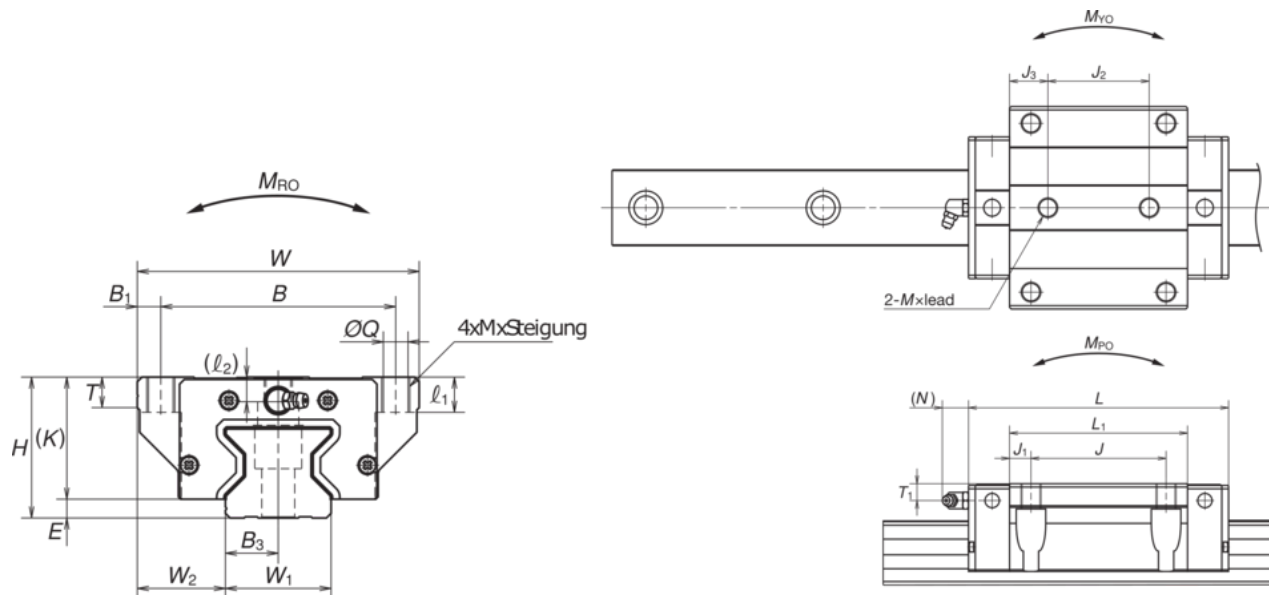

ARTIKEL	H	W	L	B	J	E	W2	J2	M × Steigung × l	Q × l	B1	L1	J1	J3	K	T	Schmier- anschluß	T1	N	Tragzahlen		Momente			Gewicht
																				dyn. (C)	stat. (Co)	MRo	MPo	MYo	
																				[N]	[Nm]	[Nm]	[kg]		
RAA25EM	36	70	97,5	57	45	5	23,5	40	M8×1,25×10 (11)	6,8×10 (11)	6,5	65,5	10,25	12,75	31	11	M6×0,75	6	11	29.200	72.700	970	760	760	0,8
RAA25GM			115,5									83,5	19,25	21,75						35.400	92.900	1.240	1.240	1.240	1,1
RAA30EM	42	90	110,8	72	52	6,5	31	44	M10×1,5×12 (12,5)	8,6×12 (12,5)	9	74	11	15	35,5	11	M6×0,75	7	11	38.900	93.500	1.670	1.140	1.400	1,3
RAA30GM			135,4									98,6	23,3	27,3						47.600	121.000	2.170	1.950	1.950	1,7
RAA35EM	48	100	123,8	82	62	6,5	33	52	M10×1,5×13 (7)	8,6×13 (7)	9	83,2	10,6	15,6	41,5	12	M6×0,75	8	11	53.300	129.000	2.810	1.800	1.800	1,7
RAA35GM			152									111,4	24,7	29,7						67.400	175.000	3.810	3.250	3.250	2,3
RAA45EM	60	120	154	100	80	8	37,5	60	M12×1,75×15 (10,5)	10,5×15 (10,5)	10	105,4	12,7	22,7	52	13	Rc1/8	10	14	92.800	229.000	6.180	4.080	4.080	3,2
RAA45GM			190									141,4	30,7	40,7						116.000	305.000	8.240	7.150	7.150	4,3
RAA55EM	70	140	184	116	95	9	43,5	70	M14×2×18 (13)	12,5×18 (13)	12	128	16,5	29	61	15	Rc1/8	11	14	129.000	330.000	10.200	7.060	7.060	5,4
RAA55GM			234									178	41,5	54						168.000	462.000	14.300	13.600	13.600	7,5
RAA65EM	90	170	228,4	142	110	13	53,5	82	M16×2×24 (18,5)	14,6×24 (18,5)	14	155,4	22,7	36,7	77	22	Rc1/8	19	14	210.000	504.000	19.200	12.700	12.700	12,2
RAA65GM			302,5									229,5	59,75	73,75						288.000	756.000	28.700	28.600	28.600	16,5