


Technisches Datenblatt – RA AN/BN

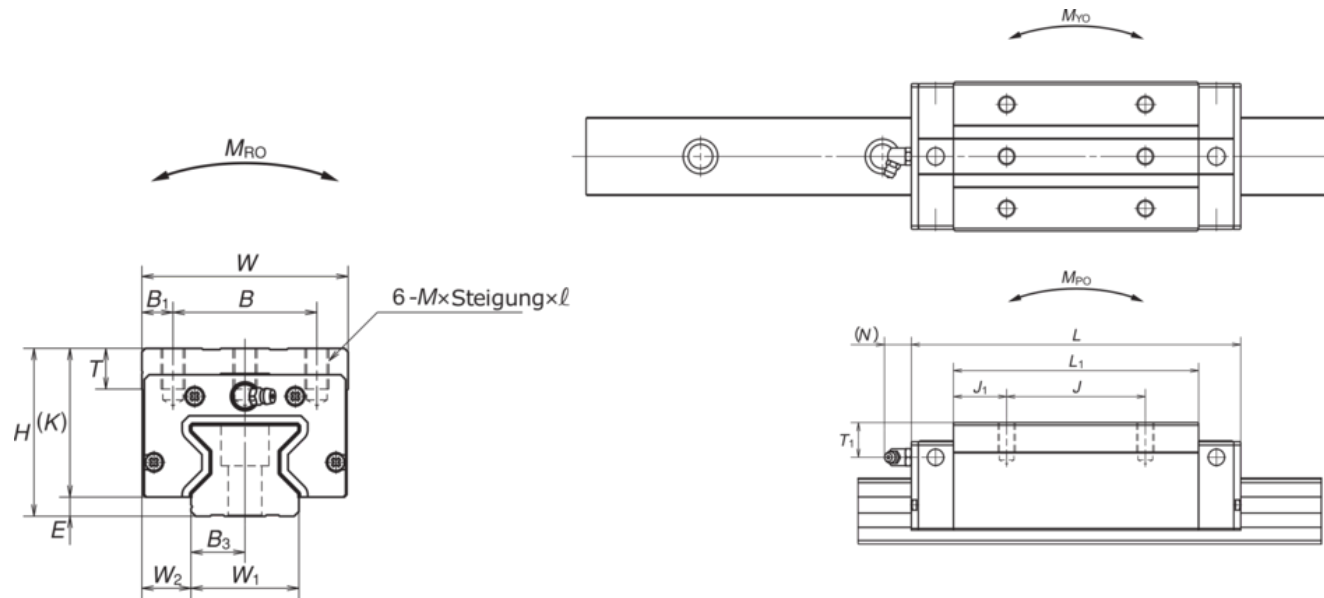

ARTIKEL	H	W	L	B	J	E	W2	M x Steigung x l	B1	L1	J1	K	T	Schmier- anschluss	T1	N	Tragzahlen		Momente			Gewicht
																	dyn. (C)	stat. (Co)	MRO	MPo	MYo	
																	[N]		[Nm]			[kg]
RAA25AN	40	48	97,5	35	35	5	12,5	M6x1x9	6,5	65,5	15,25	35	12	M6x0,7	10	11	29200	72700	970	760	760	0,6
RAA25BN			115,5		50					83,5	16,75						35400	92900	1240	1240	1240	0,91
RAA30AN	45	60	110,8	40	40	6,5	16	M8x1,25x11	10	74	17	38,5	14	M6x0,75	10	10	38900	93500	1670	1140	1140	1
RAA30BN			135,4		60					98,6	19,3						47600	121000	2170	1950	1950	1,3
RAA35AN	55	70	123,8	50	50	6,5	18	M8x1,25x12	10	83,2	16,6	48,5	15	M6x0,75	15	11	53300	129000	2810	1800	1800	1,6
RAA35BN			152		72					111,4	19,7						67400	175000	3810	3250	3250	2,1
RAA45AN	70	86	154	60	60	8	20,5	M10x1,5x17	13	105,4	22,7	62	17	Rc1/8	20	14	92800	229000	6180	4080	4080	3
RAA45BN			190		80					141,4	30,7						116000	305000	8240	7150	7150	4,1
RAA55AN	80	100	184	75	75	9	23,5	M12x1,75x18	13	128	26,5	71	18	Rc1/8	21	14	129000	330000	10200	7060	7060	4,9
RAA55BN			234		95					178	41,5						168000	462000	14300	13600	13600	6,7
RAA65AN	90	126	228,4	76	70	13	31,5	M16x2x20	25	155,4	42,7	77	22	Rc1/8	19	14	210000	504000	19200	12700	12700	9,3
RAA65BN			302,5		120					229,5	54,75						288000	756000	28700	28600	28600	12,2